


# Stark DD-100




The Stark DD-100 was designed with the user in mind. A direct drive layout coupled with an open design, lead to a smooth running compact package with better access to all components.

## Specifications

- » Air flow – 100 CFM @ 6000 PSI
- » Waterproof control box
- » 316 stainless gauge panel with inter-stage & oil pressure gauges
- » Low oil pressure shutdown switch
- » Adjustable high pressure switch
- » Automatic condensate drain system with Stark Drain Separator Silencer
- » Spin on oil filter
- » Oil level sight glass
- » Oil fill extension & bell mouth

## Options

- » Remote control box
- » Remote drain silencer
- » Air purification with CO monitor
- » Air storage (ASME or DOT)
- » Fill station (class 2)

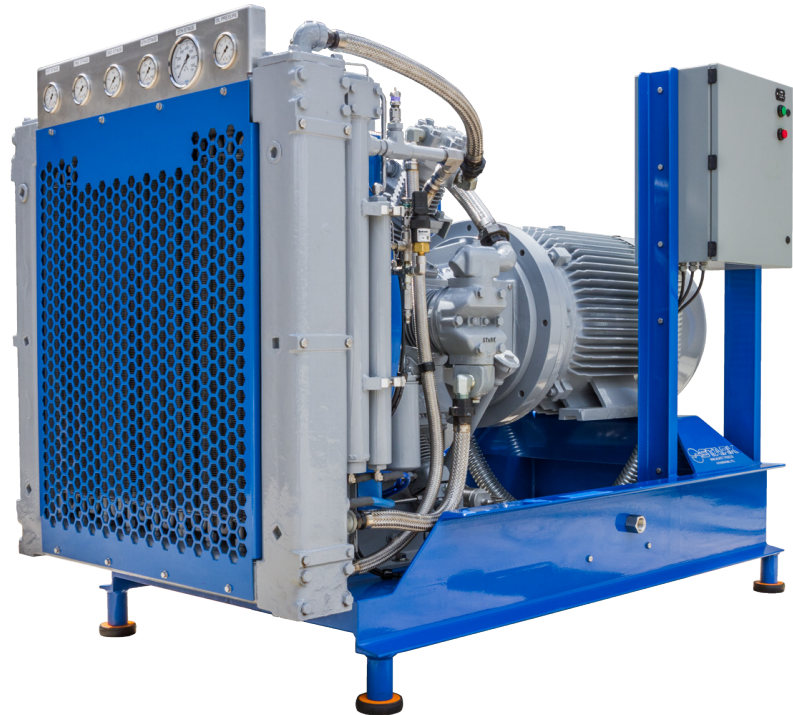

## Technical Data

Type:	Air cooled piston compressor
Capacity [cfm]:	100
Max. Pressure [psi]/[bar]:	6000 / 414
Number of cylinders / Number of stages:	6 / 5
Lubrication system:	Pressure lube
Oil capacity [quarts] / [liters] :	11 / 10.4
Motor:	100 HP TEFC
RPM [1/min]:	1750
Volts:	230 / 460
Amps:	230 / 115
Phase:	3Ø
Dimensions L x W x H [inches]:	76" x 42" x 57"
Weight [pounds]:	2800
Noise level [dBA]:	93 (measured at 3 feet)

## Stark Industries

6515 Mapleridge St  
Houston TX 77081

Phone: 713-592-0377  
Fax: 713-592-8055

E-mail: [jess@starkindustries.com](mailto:jess@starkindustries.com)  
[lori@starkindustries.com](mailto:lori@starkindustries.com)  
[josh@starkindustries.com](mailto:josh@starkindustries.com)

[www.starkindustries.com](http://www.starkindustries.com)